

# ARBOR NETWORKS APS

Always on, in-line, DDoS protection.


As your dependency for internet access and online applications and services increases, so too does the risk of Distributed Denial of Service (DDoS) attacks. In Arbor Networks' latest *Worldwide Infrastructure Security Report (WISR)*, respondents reported an increase in the size, frequency and complexity of DDoS attacks from previous years.

The Arbor Networks portfolio of DDoS attack protection solutions tackles these advanced threats head-on by providing you a complete view of network activities for fast remediation and expert-level blocking. Arbor Networks® APS helps protect business continuity and availability from the growing constellation of DDoS attacks and other advanced threats. It provides the world's most advanced and sophisticated attack detection and mitigation technology in an easy-to-deploy platform designed to automatically neutralize IPv4 and IPv6 attacks before they impact critical applications and services.

With the ATLAS® Intelligence Feed, real-time updates containing actionable intelligence on DDoS and advanced threats can help prevent an attack from entering your network. Such capabilities are:

- DDoS protection from active botnets
- DDoS protection from active DDoS campaigns based on IP reputation
- Advanced web crawler service
- GeolIP tracking
- Domain and IP reputation to block threats

Arbor APS enhances your overall protection by using Cloud Signaling™ to connect local protection with cloud-based DDoS services. With Cloud Signaling, APS automatically alerts upstream service providers, such as your ISP or Arbor Cloud<sup>SM</sup>, when larger attacks threaten availability. This allows for a faster time to mitigate attacks.

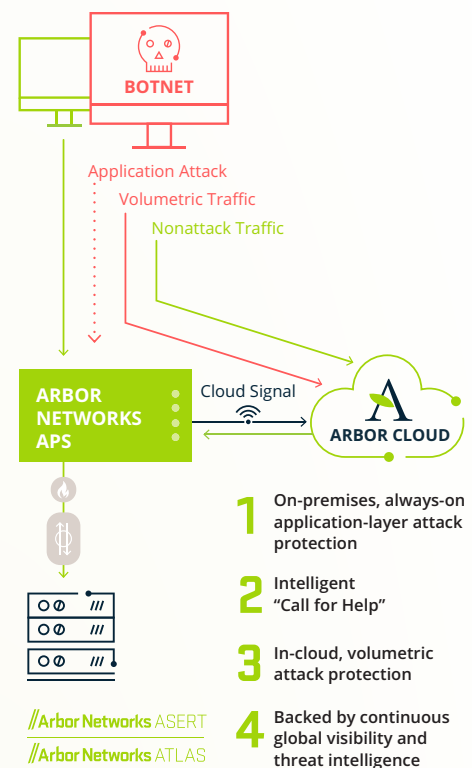

**Figure 1**

The fully integrated combination of 1) APS on premises for always on, in-line protection against application-layer attacks; 2) Intelligent Cloud Signaling to 3) Arbor Cloud to stop the larger attacks — 4) all continuously armed with the global threat intelligence of ATLAS/ASERT — offers the most comprehensive DDoS protection solution in the industry.

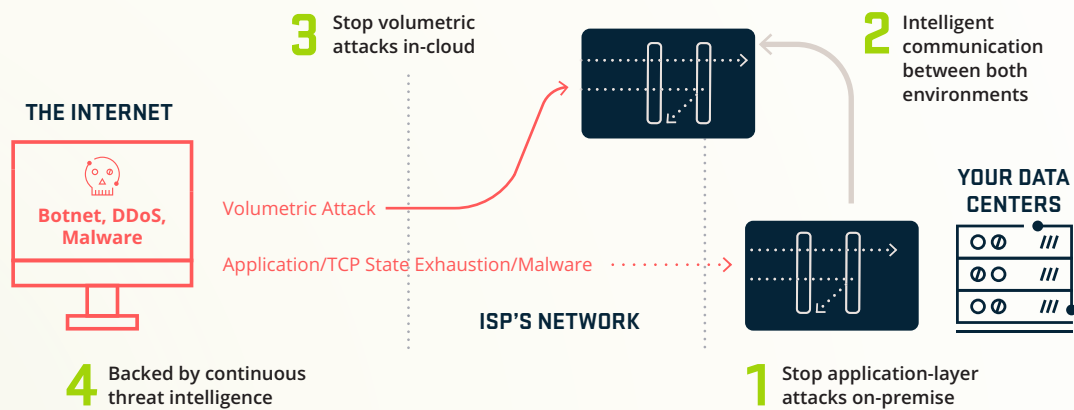


Figure 2 Layered DDoS Attack Protection

## Key Features & Benefits



### Always On, In-Line, DDoS Protection

Out of the box, on-premise protection against volumetric, state-exhaustion and application-layer DDoS attacks.



### Managed APS (mAPS) Service

Rely upon the industry leading expertise of Arbor Networks to manage your on-premise Arbor APS products and optimize your DDoS protection.



### Inbound and Outbound Protection

Stop in-bound DDoS attacks and out-bound malicious activity from compromised internal hosts.



### Support for Virtual Environments

Leverage the benefits of a virtual environment to quickly turn up DDoS protection. vAPS is a virtual version of the APS appliance.



### Intelligent Cloud Signaling

When needed, signal upstream to Arbor Cloud (or your ISP) to stop large attacks that will overwhelm your on-premises protection.



### ATLAS Intelligence Feed

Protection that is continuously updated with the latest global threat intelligence from Arbor's Security Engineering & Response Team (ASERT).



### SSL Decryption

Stop DDoS attacks hidden in encrypted traffic.



### Support for IPv6

Detect and stop both IPv4 and IPv6 attacks.

## Arbor Networks APS Platforms

Features	2600	2800
<b>Physical Dimensions</b>	<b>Chassis:</b> 2U rack height; <b>Height:</b> 3.45 inches (8.67 cm); <b>Width:</b> 17.4 inches (43.53 cm)	
	<b>Depth:</b> 20 inches (50.8 cm); <b>Weight:</b> 36.95 lbs. (16.76 kg)	
<b>Power Options</b>	<b>DC:</b> 2 x DC redundant, hot swap capable power supplies <b>DC Power Ratings:</b> -40 to -72 Vdc, 28/140 A max (per DC input) <b>AC:</b> 2 x AC redundant, hot swap capable power supplies <b>AC Power Ratings:</b> 100 to 240 VAC, 50 to 60 Hz, 12/6 A max <b>Watts:</b> 315 typical, 375 max	
<b>Hard Drives</b>	2 x 120 GB SSD in RAID 1 Configuration	2 x 240 GB SSD in RAID 1 Configuration
<b>Environmental</b>	<b>Operating:</b> Temperature 41° to 131°F (-5° to 55°C), Humidity 5 to 85%; <b>Non-Operating:</b> Temperature -40° to 158°F (-40° to 70°C), Humidity 95%	
<b>Memory</b>	32 GB	64 GB
<b>Processor</b>	2 x Intel Xeon E5-2608L v3 (6 cores) 2 GHz <b>Watts:</b> 315 typical, 375 max	Dual Intel Xeon (12-core) E5-2648L v3 -1.80GHz
<b>Operating System</b>	Our proprietary, embedded ArbOS® operating system	
<b>Management Interfaces</b>	2 x 10/100/1000 BaseT Copper; RJ-45 serial console port	2 x 10/100/1000 BaseT Copper; RJ-45 serial console port
<b>Protection Interface</b>	<ul style="list-style-type: none"> <li>• 4, 8 or 12 1G bypass ports (copper, sx fiber, lx fiber)</li> <li>• 4 x 10 G bypass ports plus 0, 4 or 8, 1 G bypass ports</li> </ul>	<ul style="list-style-type: none"> <li>• 4 x 10 GigE (SR or LR mixed fiber)</li> <li>• 8 x 10 GigE (SR or LR or mixed fiber)</li> <li>• 8 x 10 GigE (SR or LR or mixed fiber) + 4 x 1 GigE (SX or LX fiber, or copper)</li> </ul>
<b>Traffic Bypass Options</b>	Integrated hardware bypass; Internal “software” bypass to pass traffic without inspection	
<b>Latency</b>	Less than 80 microseconds	
<b>Availability</b>	Inline bypass, dual power supplies, solid-state hard drive RAID cluster	
<b>MTBF</b>	44,000 hours	
<b>Regulatory Compliance</b>	UL60950-1/CSA 60950-1 (USA/Canada); EN60950-1 (Europe); IEC60950-1 (International), CB Certificate & Report including all international deviations; GS Certificate (Germany); EAC-R Approval (Russia); CE—Low Voltage Directive 73/23/EEE (Europe); BSMI CNS 13436 (Taiwan); KCC (South Korea); RoHS Directive 2002/95/EC (Europe)	
<b>Inspected Throughput</b>	Licenses for 100 Mbs, 500 Mbs, 1 Gbps, 2 Gbps, 5 Gbps, 10 Gbps, 15 Gbps, 20 Gbps	Licenses for 10 Gbps, 20 Gbps, 30 Gbps, 40 Gbps; software upgradeable
<b>Maximum DDoS Flood Prevention Rate</b>	Up to 15 Mpps	Up to 28.80 Mpps
<b>Simultaneous Connections</b>	Not applicable: APS does not track connections	
<b>HTTP(s) Connections/Sec</b>	368K at recommended protection level; 613K filter list only protection	1,351K at recommended protection level; 1,497K filter list only protection
<b>SSL Decryption Options</b>	<b>Inspected Throughput:</b> Options for 750 Mbps and 5 Gbps <b>HTTPS Connections:</b> Up to 7,500 (750M HSM) or 45,000 (5G HSM) <b>Concurrent Sessions:</b> Up to 150,000	<b>Inspected Throughput:</b> Up to 5 Gbps <b>HTTPS Connections:</b> Up to 45,000 <b>Concurrent Sessions:</b> Up to 150,000
	FIPS 140-2 Level 2 and 3 support; Separate “Trusted-Path” Administration for FIPS 140-2 Level 3; Secure tamper-proof enclosure; Keys cleared if enclosure breached; Power: <25 Watts; Operating Temperature: 0 to 50 C; Regulatory Compliance: CTUVus UL (USA/Canada), FCC / ICES Class A FIPS 140-2 Level 2 and 3 support; Separate “Trusted-Path” Administration for FIPS 140-2 Level 3; Secure tamper-proof enclosure; Keys cleared if enclosure breached; Power: <25 Watts; Operating Temperature: 0 to 50 C; Regulatory Compliance: CTUVus UL (USA/Canada), FCC / ICES Class A	
<b>Maximum number of Keys/Certificate Pairs</b>	1998	
<b>Protected Endpoints</b>	Unlimited	
<b>Authentication</b>	On device, RADIUS; TACACS	

## Arbor Networks APS Platforms (cont'd)

Features	2600/ 2800
<b>Management</b>	SNMP gets v1, v2c; SNMP traps v1, v2c, v3; CLI; Web UI; HTTPS; SSH customizable, role-based management
<b>Protection Groups</b>	50
<b>Reporting and Forensics</b>	Real-time and historical IPV4 and IPV6 traffic reporting, extensive drill-down by protection group and blocked host including total traffic, passed/blocked,top destination URLs/services/domains, attack types, blocked sources, top sources by IP location. Packet visibility in real-time.
<b>DDoS Protection</b>	TCP/UDP/HTTP(S) flood attacks, botnet protection, hacktivist protection, host behavioral protection, anti-spoofing, configurable flow expression filtering, payload expression-based filtering, permanent and dynamic blacklists/whitelists, traffic shaping, multiple protections for HTTP, DNS and SIP, TCP connection limiting, fragmentation attacks, connection attacks.
<b>Modes</b>	Inline active; inline inactive (reporting, no blocking); SPAN port monitor
<b>Notifications</b>	SNMP trap, syslog, email
<b>Cloud Signaling</b>	Yes (collaborative DDoS attack mitigation with service provider or Arbor Cloud)
<b>Web-Based GUI</b>	Supports multi-language translated user interfaces
<b>Supported Browsers</b>	Internet Explorer v10-11, Firefox ESR v31, Firefox v40, Chrome v44, Safari v6

## Virtual APS (vAPS)

Features	Hypervisor	
<b>Virtual Network Function (VNF) Orchestration</b>	Cloud-Init v0.7.6, Openstack Kilo and Mitaka series	
<b>Supported Hypervisor</b>	VMware vSphere 5.5+; KVM kernel 3.19 QEMU 2.0	
<b>Minimum Virtual Machine Requirements</b>	vCPUs: 1; NICs: 1 to 10; Memory: 6 GB; Storage: 100 GB	
<b>Inspection Throughput/Instance</b>	1 Gbps	
<b>Maximum DDoS Flood Rate/Instance</b>	910 Kpps	600 Kpps
<b>Throughput, Max Flood/Server</b>	4 Gbps, 2.40 Mpps	



[arbornetworks.com](http://arbornetworks.com)

©2017 Arbor Networks, Inc. All rights reserved. Arbor Networks, the Arbor Networks logo, ArbOS and ATLAS are all trademarks of Arbor Networks, Inc. All other brands may be the trademarks of their respective owners.

DS/APS/EN/0417-LETTER

### Corporate Headquarters

76 Blanchard Road  
Burlington, MA 01803 USA  
Toll Free USA: +1 866 212 7267  
T: +1 781 362 4300

### North American Sales

Toll Free: +1 855 773 9200

### Europe

T: +44 207 127 8147

### Asia Pacific

T: +65 6664 3140

### Latin & Central America

T: +52 55 4624 4842